

TWO SIZES  
Model 6000  
Model 7000




**ALLIED**

**HOVRAM<sup>®</sup>**

BOOM-MOUNTED PNEUMATIC IMPACT HAMMERS

*For demolition work . . .  
pavement breaking . . . driving sheeting*

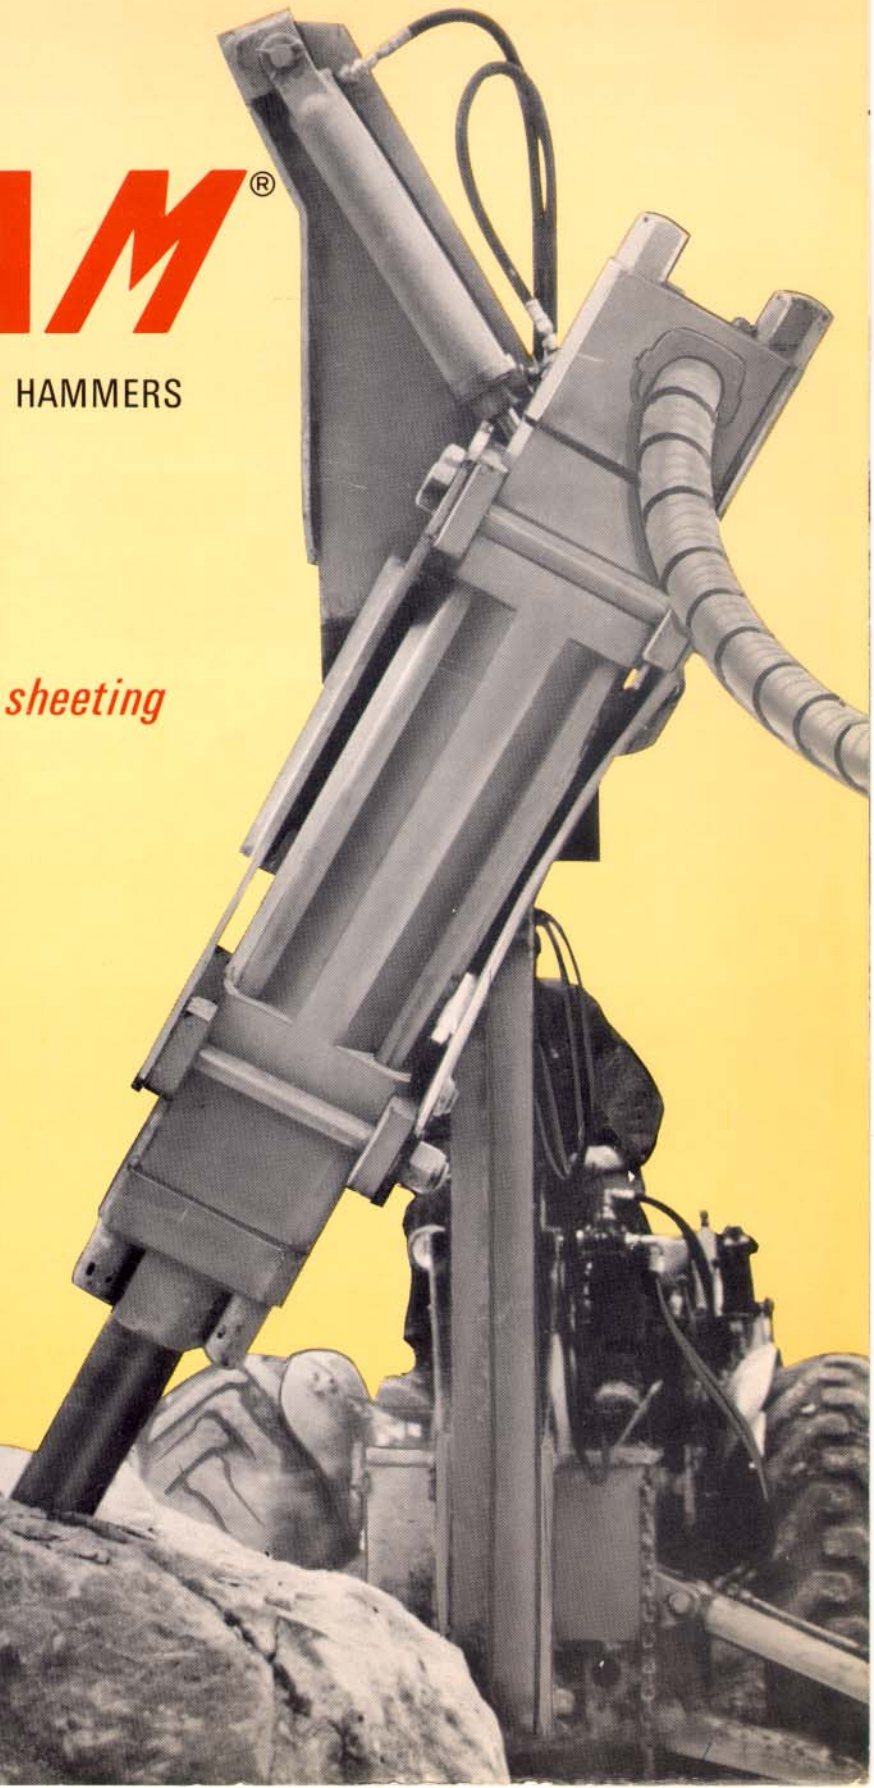



# HOVRAM<sup>®</sup>

## SPECIFICATIONS

*BOTH MODELS AVAILABLE WITH EITHER STANDARD MOUNTING BRACKET OR SIDE ANGLE POSITIONER*

	MODEL 6000	7000
Energy per minute, Ft. Lbs. . . . .	231,000	400,000
Impact Energy Ft. Lbs. . . . .	700	1,000
Blows per minute . . . . .	330	400
Weight with Standard Mounting Bracket. . . . .	700 lbs.	1,100 lbs.
Weight with Side Angle Positioner . . . . .	960 lbs.	1,360 lbs.
Overall Length . . . . .	60"	66"
Spacing Inside Mounting Bracket . . . . .	10 <sup>1</sup> / <sub>4</sub> "	10 <sup>1</sup> / <sub>4</sub> "
Recommended Minimum Compressor Size . . . . .	150 CFM Minimum	Over 300 CFM
Minimum Hose Size . . . . .	1"	1 <sup>1</sup> / <sub>4</sub> "

**NOTE:** *HO-RAMS are sold with 1<sup>1</sup>/<sub>2</sub>" mounting pins, inlet fitting, choice of standard tool (marked with asterisk below) and lubricator.*

### HOVRAM ACCESSORIES



\* MOIL POINT




\* CHISEL POINT



FLAT POINT



TIMBER SHEETING ATTACHMENT



STEEL SHEETING ATTACHMENT

*Also special attaching brackets for oversize or unconventional booms or dipper connections.*

Other **ALLIED** products

**HO-PAC** Hydraulic Vibratory Compactors and Sheeting Drivers

**TREN-SHORE** Aluminum Hydraulic Shoring

**HYDRO-FRAME** Aluminum Hydraulic Shores for sheeted trenches

**ROTO-CUT** Rotary Asphalt Cutters



**STEEL & TRACTOR PRODUCTS, INC.**

19200 Cranwood Parkway, Cleveland, Ohio 44128 • (216) 475-6700

*Sold and serviced by*